# **ENVELOPES**

### File Specifications:


- Bleed: NO Bleed is required on any envelope art
- Recommended Safe Zone: 10mm from top, 3mm in from base and sides of envelope and around window (if window is required)
- Accepted File Types: PDF version 1.4 or higher
- > Recommended Resolution: Minimum of 300 dpi for all images and less than 200% ink density

#### Essentials:

- Colours must be either CMYK, PMS or black (100% K only). Please convert all RGB
- All fonts must be embedded or converted to curves so they print correctly

## DL ENVELOPES (OPENING ON LONG EDGE)

SIZE: II0mm x 220mm

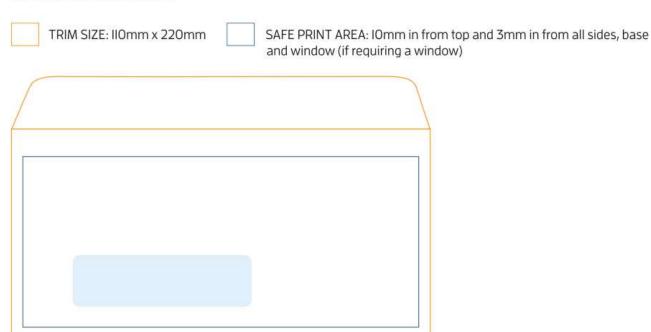

> Standard window is 28mm x 95mm, 32mm fom the left and 16mm from the base



### C5 ENVELOPES (OPENING ON LONG OR SHORT EDGE)

SIZE: 162mm x 229mm

	TRIM SIZE: I62mm x 229mm SAFE PRINT AREA: I0mm in from top and 3mm in from all sides and base
1	
CA	ENVELOPES (OPENING ON LONG OR SHORT EDGE)
	: 229mm x 324mm
	TRIM SIZE: 229mm x 324mm SAFE PRINT AREA: I0mm in from top and 3mm in from all sides and base
1	

- Artwork can be Black only, 1PMS, 2PMS, 3PMS or CMYK
  Artwork colours must be specified when requesting a quote
- > Standard quotes allow for upto 25% ink coverage